

Survey Form

Rasco Industries, Inc.
 50 Medina Street South
 Loretto MN, 55357-9548
 Phone: 800-537-3802,
 763-479-1144
 Fax: 800-537-3602,
 763-479-1147
 www.bugblocker.com

Company: _____ P.O. Number: _____

Phone: _____ Fax: _____


Address: _____ City: _____

St: _____ Zip: _____ Quantity: _____ Date Required: _____


Prepared By: _____ Tag: _____

Special Instructions: _____

Bug Blocker Screen or Chain-Link Security Door / Vertical Lift / Switch Track

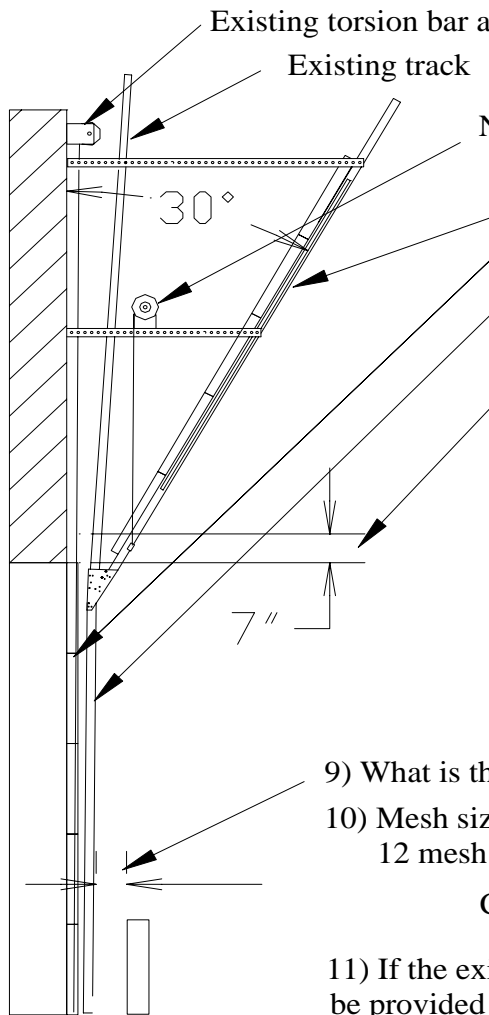

- 1) Any interference for Rasco track? Yes _____ No _____
- 2) What is the existing door thickness? _____ in
- 3) What is the track width? 2 in _____ 3 in _____
- 4) Is the existing track in good condition? _____
- 5) In the open position the existing door must stop a minimum of 7" above the opening. Can you do it? _____
- 6) Opening width _____ ft _____ in, height _____ ft _____ in
- 7) Existing door width _____ ft _____ in, height _____ ft _____ in
- 8) Distance from outside to outside of existing track?

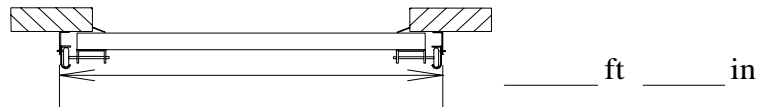

- 9) What is the distance from existing track to bollard? _____ in
- 10) Mesh size?
 12 mesh stainless _____ 30 mesh stainless _____
 Chain link 11 gauge galvanized _____

11) If the existing door is motor operated, an interlock switch should be provided on the Rasco track. Yes _____ No _____

12) If the Rasco door is to be motor operated, an interlock switch and a solid shaft should be provided. Yes _____ No _____

Note: The Rasco door has outside pull brackets / cables.

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables or has TKO, Workhorse or Barcol type tracks.