

Survey Form

Rasco Industries, Inc.
 50 Medina Street South
 Loretto MN, 55357-9548
 Phone: 800-537-3802,
 763-479-1144
 Fax: 800-537-3602,
 763-479-1147
 www.bugblocker.com

Company: _____ P.O. Number: _____

Phone: _____ Fax: _____


Address: _____ City: _____

St: _____ Zip: _____ Quantity: _____ Date Required: _____

Prepared By: _____ Tag: _____

Special Instructions: _____

Bug Blocker Screen or Chain-Link Security Door - Standard Lift / Switch Track

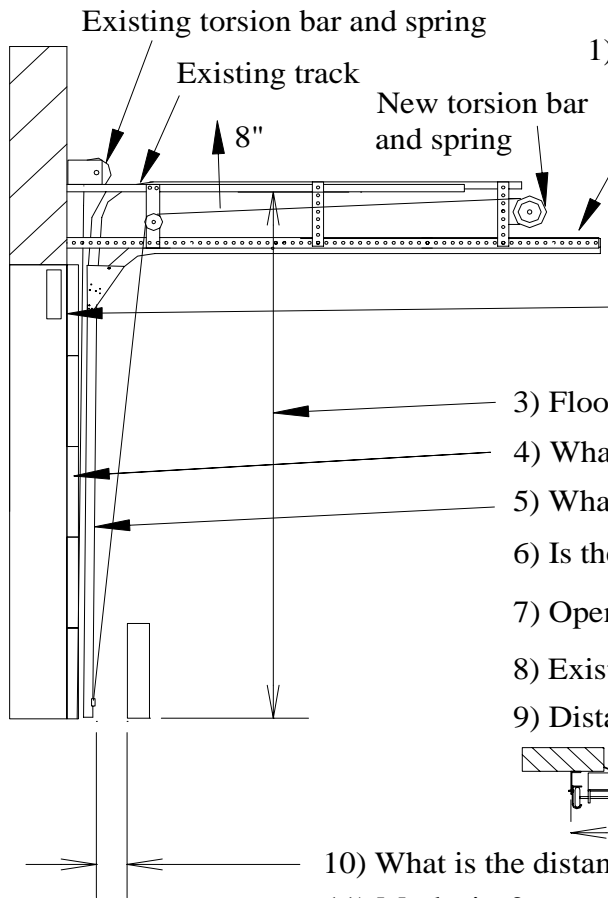

1) Any interference for new track? Yes ___ No ___

2) Select one option (A,B)

___ A) High lift the existing track 8". (Best Option)

___ B) Add a 12" fixed panel in top of opening.

3) Floor to existing horizontal track? ___ ft ___ in

4) What is the existing door thickness? ___ in


5) What is the track width? 2 in ___ 3 in ___

6) Is the existing track in good condition? _____

7) Opening width ___ ft ___ in, height ___ ft ___ in

8) Existing door width ___ ft ___ in, height ___ ft ___ in

9) Distance from outside to outside of existing track?

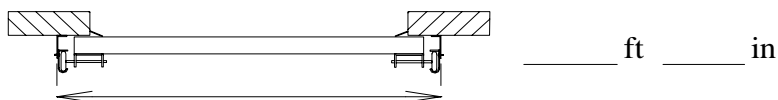

10) What is the distance from existing track to bollard? _____ in

11) Mesh size?

12 mesh stainless _____ 30 mesh stainless _____

Chain link 11 gauge galvanized _____

12) If the existing door is motor operated, an interlock switch should be provided on the new track. Yes ___ No ___

13) If the Rasco door is to be motor operated, an interlock switch and a solid shaft should be provided. Yes ___ No ___

Note: The Rasco door has outside pull brackets / cables.

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables or has TKO, Workhorse or Barcol type tracks.