

Survey Form

**Rasco Industries, Inc.**  
 50 Medina Street South  
 Loretto MN, 55357-9548  
 Phone: 800-537-3802,  
 763-479-1144  
 Fax: 800-537-3602,  
 763-479-1147  
**www.bugblocker.com**

Company: \_\_\_\_\_ P.O. Number: \_\_\_\_\_

Phone: \_\_\_\_\_ Fax: \_\_\_\_\_


Address: \_\_\_\_\_ City: \_\_\_\_\_

St: \_\_\_\_\_ Zip: \_\_\_\_\_ Quantity: \_\_\_\_\_ Date Required: \_\_\_\_\_

Prepared By: \_\_\_\_\_ Email: \_\_\_\_\_

Special Instructions/ Tag: \_\_\_\_\_

**Bug Blocker® Screen or Chain-Link Security Door - Standard Lift / Switch Track**

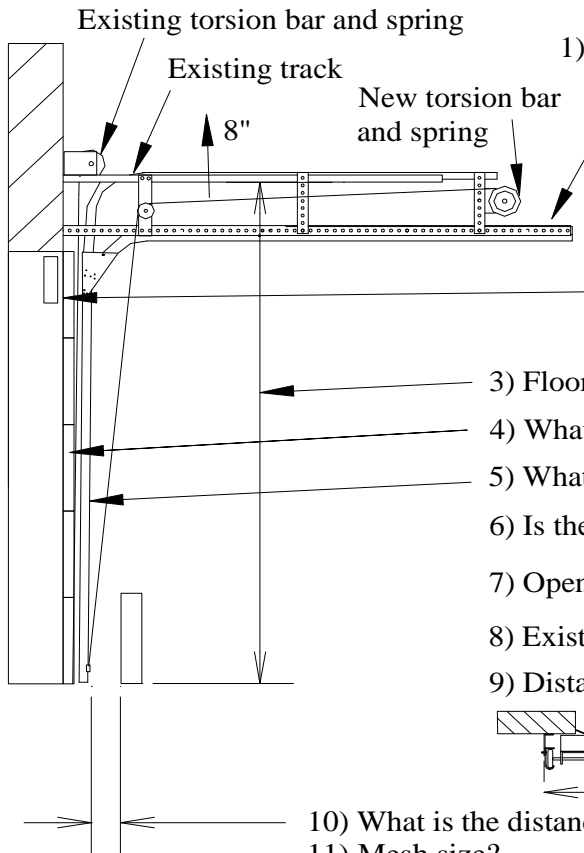

1) Any interference for new track? Yes \_\_\_ No \_\_\_

2) Select one option (A,B)

\_\_\_ A) High lift the existing track 8". (Best Option)

\_\_\_ B) Add a 12" fixed panel in top of opening.

3) Floor to existing horizontal track? \_\_\_ ft \_\_\_ in

4) What is the existing door thickness? \_\_\_ in


5) What is the track width? 2 in \_\_\_ 3 in \_\_\_

6) Is the existing track in good condition? \_\_\_\_\_

7) Opening width \_\_\_ ft \_\_\_ in, height \_\_\_ ft \_\_\_ in

8) Existing door width \_\_\_ ft \_\_\_ in, height \_\_\_ ft \_\_\_ in

9) Distance from outside to outside of existing track?



\_\_\_\_\_ ft \_\_\_\_\_ in

10) What is the distance from existing track to bollard? \_\_\_\_\_ in

11) Mesh size?

12 mesh stainless \_\_\_ 30 mesh stainless \_\_\_

Chain link 11 gauge \_\_\_ Expanded metal stainless \_\_\_

12) If the existing door is motor operated, an interlock switch should be provided on the new track. Yes \_\_\_ No \_\_\_

13) If the Rasco door is to be motor operated, an interlock switch and a solid shaft should be provided. Yes \_\_\_ No \_\_\_

Note: The Rasco door has outside pull brackets / cables.

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables or has TKO, Workhorse or Barcol type tracks.