

Rasco Industries, Inc.
 5310 Shoreline Drive
 Mound, MN 55364
 United States
Phone: 800-537-3802
 Fax: 952-283-1261
 Sales@Rascoind.com



RASCO
INDUSTRIES, INC.
 BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

SPECIAL INSTRUCTIONS: _____

QUANTITY: _____

PREPARED BY: _____

EMAIL: _____

COMPANY: _____


ADDRESS: _____

PHONE: _____


FAX: _____

SHIP TO ZIP: _____

Bug Blocker® Screen Door - Standard Lift / Dual Track

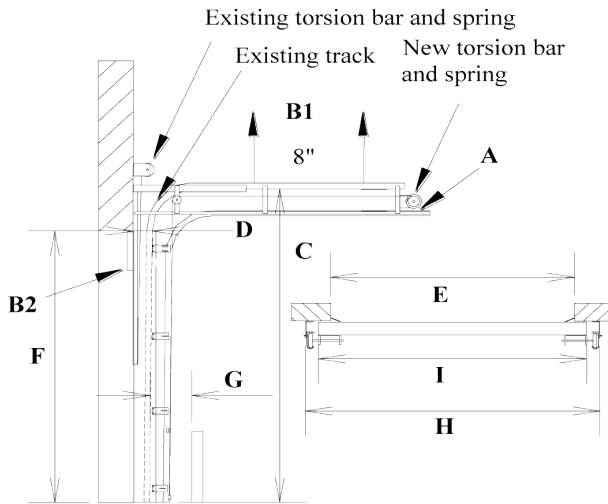

Note: The Rasco door has outside pull brackets / cables.

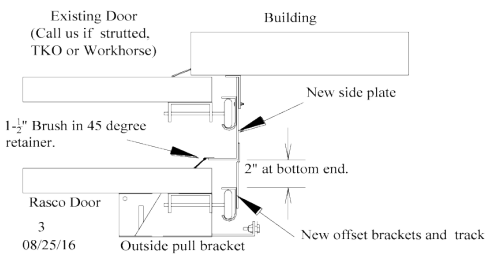

- A) Any interference for Rasco track? y n
- B) 1) High Lift existing track 8" (best option)
 2) Add fixed panel to top of opening or
- C) Floor to existing horizontal track _____ ft _____ in
- D) Wall to furthest part of existing track at top of opening or if fixed panel is used, to the bottom of that _____ in
- E) Opening Width _____ ft _____ in
- F) Opening Height _____ ft _____ in
- G) Distance from Existing Track to Bollard _____ ft _____ in
- H) Existing Track Outside-to-Outside _____ ft _____ in
- I) Existing Door Width _____ ft _____ in
- J) Existing Door Height _____ ft _____ in
- K) Existing track in good condition? y n
- L) Existing Track Width _____ in
- M) Will Rasco door be motorized? y n
- N) If yes, is Rasco providing the operator? y n
- O) 12 Mesh
 30 Mesh
 Expanded Metal
- P) Rasco door Track Width 2" 3"

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Dual track cannot be used if existing door has outside pull cables.