

**Rasco Industries, Inc.**  
 5310 Shoreline Drive  
 Mound, MN 55364  
 United States  
**Phone: 800-537-3802**  
 Fax: 952-283-1261  
 Sales@Rascoind.com



**RASCO**  
 INDUSTRIES, INC.  
 BUGBLOCKER.COM

**P.O. NO:** \_\_\_\_\_

**DATE REQUIRED:** \_\_\_\_\_

**TAG:** \_\_\_\_\_

**SPECIAL INSTRUCTIONS:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**PREPARED BY:** \_\_\_\_\_

**EMAIL:** \_\_\_\_\_

**COMPANY:** \_\_\_\_\_


**ADDRESS:** \_\_\_\_\_

**PHONE:** \_\_\_\_\_


**FAX:** \_\_\_\_\_

**SHIP TO ZIP:** \_\_\_\_\_

**Bug Blocker® Screen Door - Standard Lift / Stand Alone**

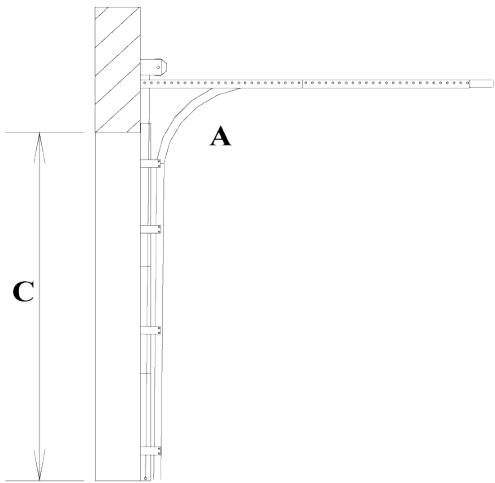

- A) Rasco door Track Width  2"  3"
- B) Opening Width \_\_\_\_\_ ft \_\_\_\_\_ in
- C) Opening Height \_\_\_\_\_ ft \_\_\_\_\_ in
- D) Brush Seal for perimeter  y  n
- E) Will Rasco door be motorized?  y  n
- F) If yes, is Rasco providing the jackshaft operator?  y  n
- G) 12 Mesh   
 30 Mesh   
 Expanded Metal

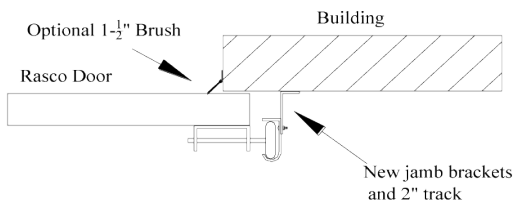

Notes: A solid shaft is required on all doors 12' or wider.  
 Door overlaps opening by 2".