

Rasco Industries, Inc.
 5310 Shoreline Drive
 Mound, MN 55364
 United States
Phone: 800-537-3802
 Fax: 952-283-1261
 Sales@Rascoind.com



RASCO
INDUSTRIES, INC.
 BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

SPECIAL INSTRUCTIONS: _____

QUANTITY: _____

PREPARED BY: _____

EMAIL: _____

COMPANY: _____


ADDRESS: _____

PHONE: _____

FAX: _____

SHIP TO ZIP: _____

Bug Blocker® Screen Door - Standard Lift / Switch Track

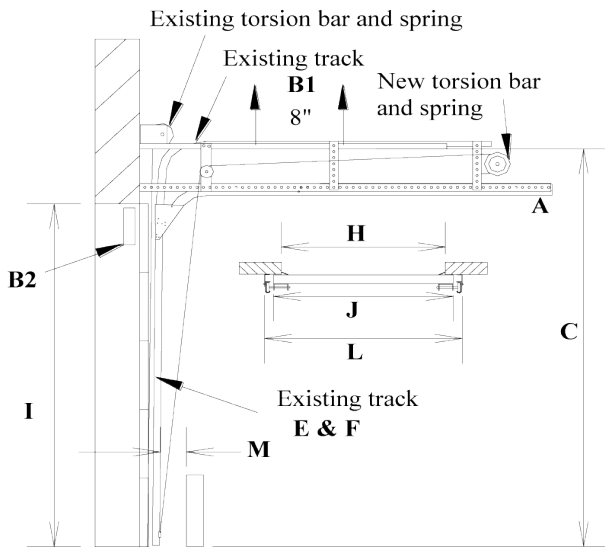

Note: The Rasco door has outside pull brackets / cables.

6
08/25/15

- A) Any interference for Rasco track? y n
- B) 1) High Lift existing track 8" (best option)
 2) Add fixed panel to top of opening
 or
- C) Floor to existing horizontal track _____ ft _____ in
- D) Existing Door Thickness _____ in
- E) Existing Track Width _____ in
- F) Existing track in good condition? y n
- G) In the open position, can existing door stop a minimum of 7" above the opening? y n
- H) Opening Width _____ ft _____ in
- I) Opening Height _____ ft _____ in
- J) Existing Door Width _____ ft _____ in
- K) Existing Door Height _____ ft _____ in
- L) Existing Track Outside-to-Outside _____ ft _____ in
- M) Distance from Existing Track to Bollard _____ ft _____ in
- N) 12 Mesh
 30 Mesh
 Expanded Metal
- O) Is existing door motorized? y n
 Interlock Switch on new track? y n
- P) Will Rasco door be motorized? y n
 Interlock Switch and Solid Shaft? y n
- Q) If yes, is Rasco providing the operator? y n
- R) If the graduated hinge count is not typical (1,2,3,4, etc...), what is it? _____

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables. or has TKO, Workhorse or Barcol type tracks.