Rasco Industries, Inc.
5310 Shoreline Drive
Mound, MN 55364
United States
Phone: 800-537-3802
Fax: 952-283-1261
Sales@Rascoind.com

RASCO INDUSTRIES, INC.
BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

COMPANY: _____

ADDRESS: _____

SPECIAL INSTRUCTIONS: _____

PHONE: _____

QUANTITY: _____

FAX: _____

PREPARED BY: _____

SHIP TO ZIP: _____

EMAIL: _____

Chain Link Security Door - High Lift / Switch Track

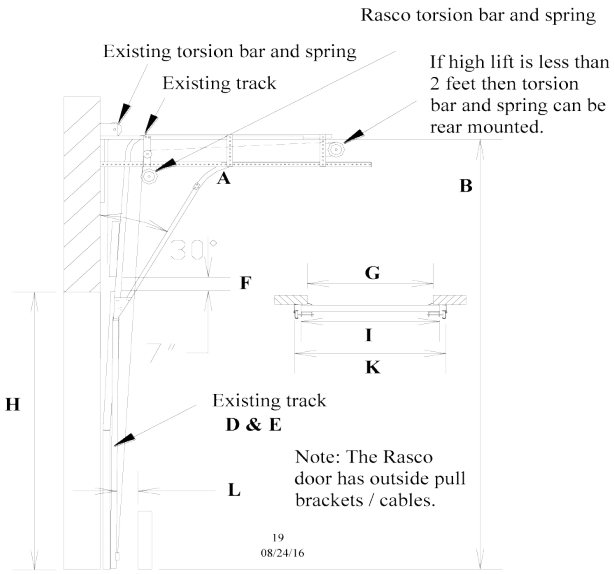

A) Any interference for Rasco track? ☐ y ☐ n

B) Floor to existing horizontal track ____ ft ____ in

C) Existing Door Thickness ____ in

D) Existing Track Width ____ in

E) Existing track in good condition? ☐ y ☐ n

F) In the open position, can existing door stop a minimum of 7" above the opening? ☐ y ☐ n

G) Opening Width ____ ft ____ in

H) Opening Height ____ ft ____ in

I) Existing Door Width ____ ft ____ in

J) Existing Door Height ____ ft ____ in

K) Existing Track Outside-to-Outside ____ ft ____ in

L) Distance from Existing Track to Bollard ____ ft ____ in

M) Is existing door motorized? ☐ y ☐ n

Provide Interlock Switch on new track? ☐ y ☐ n

N) Will Rasco door be motorized? ☐ y ☐ n

Provide Interlock Switch and Solid Shaft? ☐ y ☐ n

O) If yes, is Rasco providing the operator? ☐ y ☐ n

P) If the graduated hinge count is not typical (1,2,3,4, etc…), what is it? _____

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables. or has TKO, Workhorse or Barcol type tracks.