

Rasco Industries, Inc.
 5310 Shoreline Drive
 Mound, MN 55364
 United States
Phone: 800-537-3802
 Fax: 952-283-1261
 Sales@Rascoind.com



RASCO
INDUSTRIES, INC.
 BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

SPECIAL INSTRUCTIONS: _____

QUANTITY: _____

PREPARED BY: _____

EMAIL: _____

COMPANY: _____


ADDRESS: _____

PHONE: _____

FAX: _____

SHIP TO ZIP: _____

Chain Link Security Door - Standard Lift / Behind Rolling with Deep Reverse

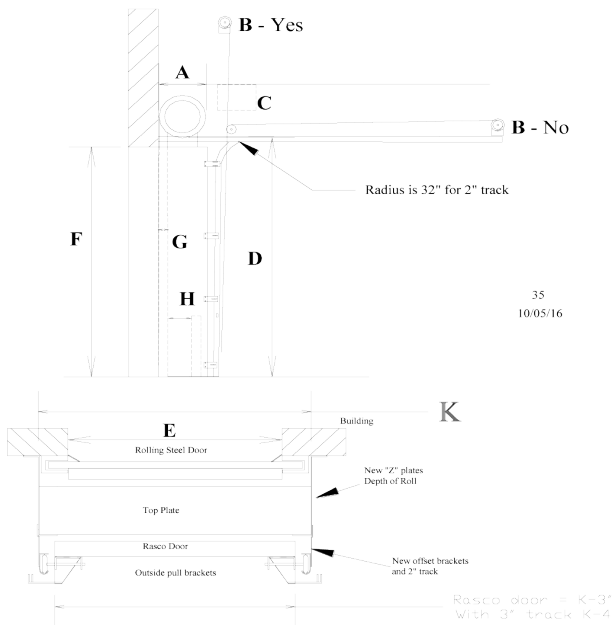

- A) Distance to back of roll _____ in
- B) Can torsion bar be mounted at least 24" above opening?
 (If NO, it will be rear mounted) y n
- C) Any interference from motor operator? y n
- D) Distance from floor to bottom of roll _____ ft _____ in
- E) Opening Width _____ ft _____ in
- F) Opening Height _____ ft _____ in
- G) Depth of existing track _____ in
- H) Distance from bollards to existing guide _____ in
- I) Will Rasco door be motorized? y n
- J) If yes, is Rasco providing the operator? y n
- K) Guide Outside-to-Outside Distance
 (NOT the opening size) _____ ft _____ in
- L) Rasco door Track Width 2" 3"

35
 10/05/16

A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. The Rasco door has outside pull brackets / cables.