

Rasco Industries, Inc.
 5310 Shoreline Drive
 Mound, MN 55364
 United States
Phone: 800-537-3802
 Fax: 952-283-1261
 Sales@Rascoind.com



RASCO
INDUSTRIES, INC.
 BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

SPECIAL INSTRUCTIONS: _____

QUANTITY: _____

PREPARED BY: _____

EMAIL: _____

COMPANY: _____


ADDRESS: _____

PHONE: _____


FAX: _____

SHIP TO ZIP: _____

Chain-Link Security Door - Standard Lift / Dual Track

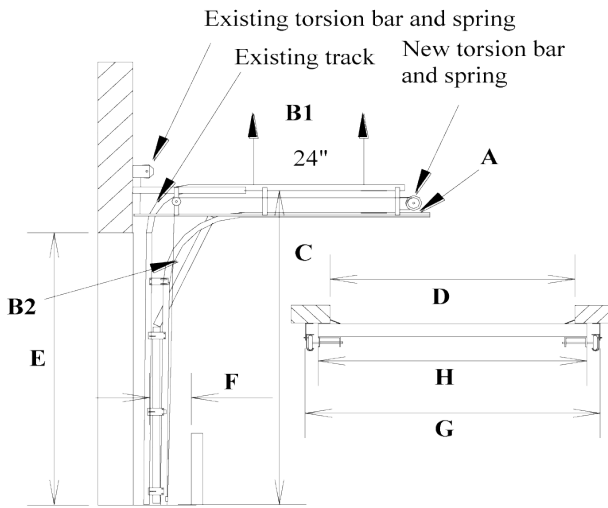

Note: The Rasco door has outside pull brackets / cables.

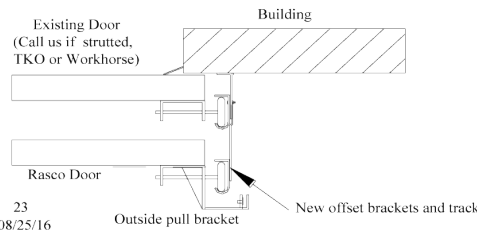

23
08/25/16

- A) Any interference for Rasco track? y n
- B) 1) High Lift existing track 24"
 2) Allow top panel to tilt back
- C) Floor to existing horizontal track _____ ft _____ in
- D) Opening Width _____ ft _____ in
- E) Opening Height _____ ft _____ in
- F) Distance from Existing Track to Bollard _____ ft _____ in
- G) Existing Track Outside-to-Outside _____ ft _____ in
- H) Existing Door Width _____ ft _____ in
- I) Existing Door Height _____ ft _____ in
- J) Existing lower track in good condition? y n
- K) Existing Track Width _____ in
- L) Will Rasco door be motorized? y n
- M) If yes, is Rasco providing the operator? y n
- N) Rasco door Track Width 2" 3"

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Dual track cannot be used if existing door has outside pull cables.