

Rasco Industries, Inc.
 5310 Shoreline Drive
 Mound, MN 55364
 United States
Phone: 800-537-3802
 Fax: 952-283-1261
 Sales@Rascoind.com



RASCO
INDUSTRIES, INC.
 BUGBLOCKER.COM

P.O. NO: _____

DATE REQUIRED: _____

TAG: _____

SPECIAL INSTRUCTIONS: _____

QUANTITY: _____

PREPARED BY: _____

EMAIL: _____

COMPANY: _____


ADDRESS: _____

PHONE: _____

FAX: _____

SHIP TO ZIP: _____

Chain Link Security Door - Standard Lift / Switch Track

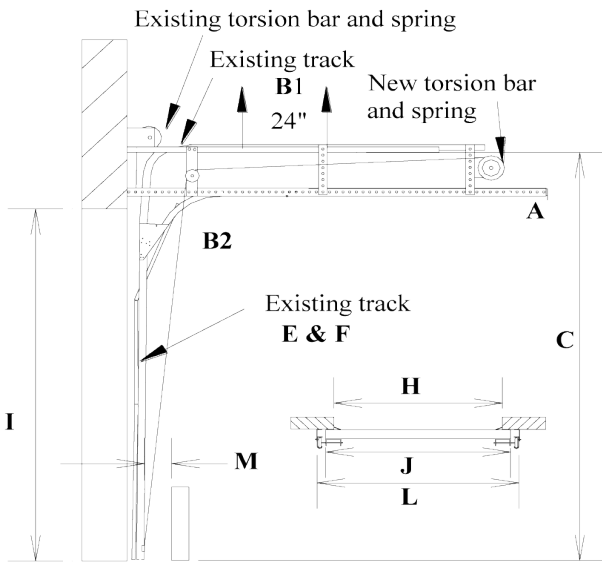

20
08/25/15

Note: The Rasco door has outside pull brackets / cables.

- A) Any interference for Rasco track? y n
- B) 1) High Lift existing track 24" (best option)
 2) Allow Chain Link Top Panel to lean back
 or
- C) Floor to existing horizontal track _____ ft _____ in
- D) Existing Door Thickness _____ in
- E) Existing Track Width _____ in
- F) Existing track in good condition? y n
- G) In the open position, can existing door stop a minimum of 7" above the opening? y n
- H) Opening Width _____ ft _____ in
- I) Opening Height _____ ft _____ in
- J) Existing Door Width _____ ft _____ in
- K) Existing Door Height _____ ft _____ in
- L) Existing Track Outside-to-Outside _____ ft _____ in
- M) Distance from Existing Track to Bollard _____ ft _____ in
- N) Is existing door motorized? y n
 Interlock Switch on new track? y n
- O) Will Rasco door be motorized? y n
 Interlock Switch and Solid Shaft? y n
- P) If yes, is Rasco providing the operator? y n
- Q) If the graduated hinge count is not typical (1,2,3,4, etc...), what is it? _____

Notes: A torsion bar support is required on all doors 10' or wider and a solid shaft if 12' or wider. Switch track cannot be used if existing door has outside pull cables. or has TKO, Workhorse or Barcol type tracks. The top section might lean back.